




ASTRONERGY

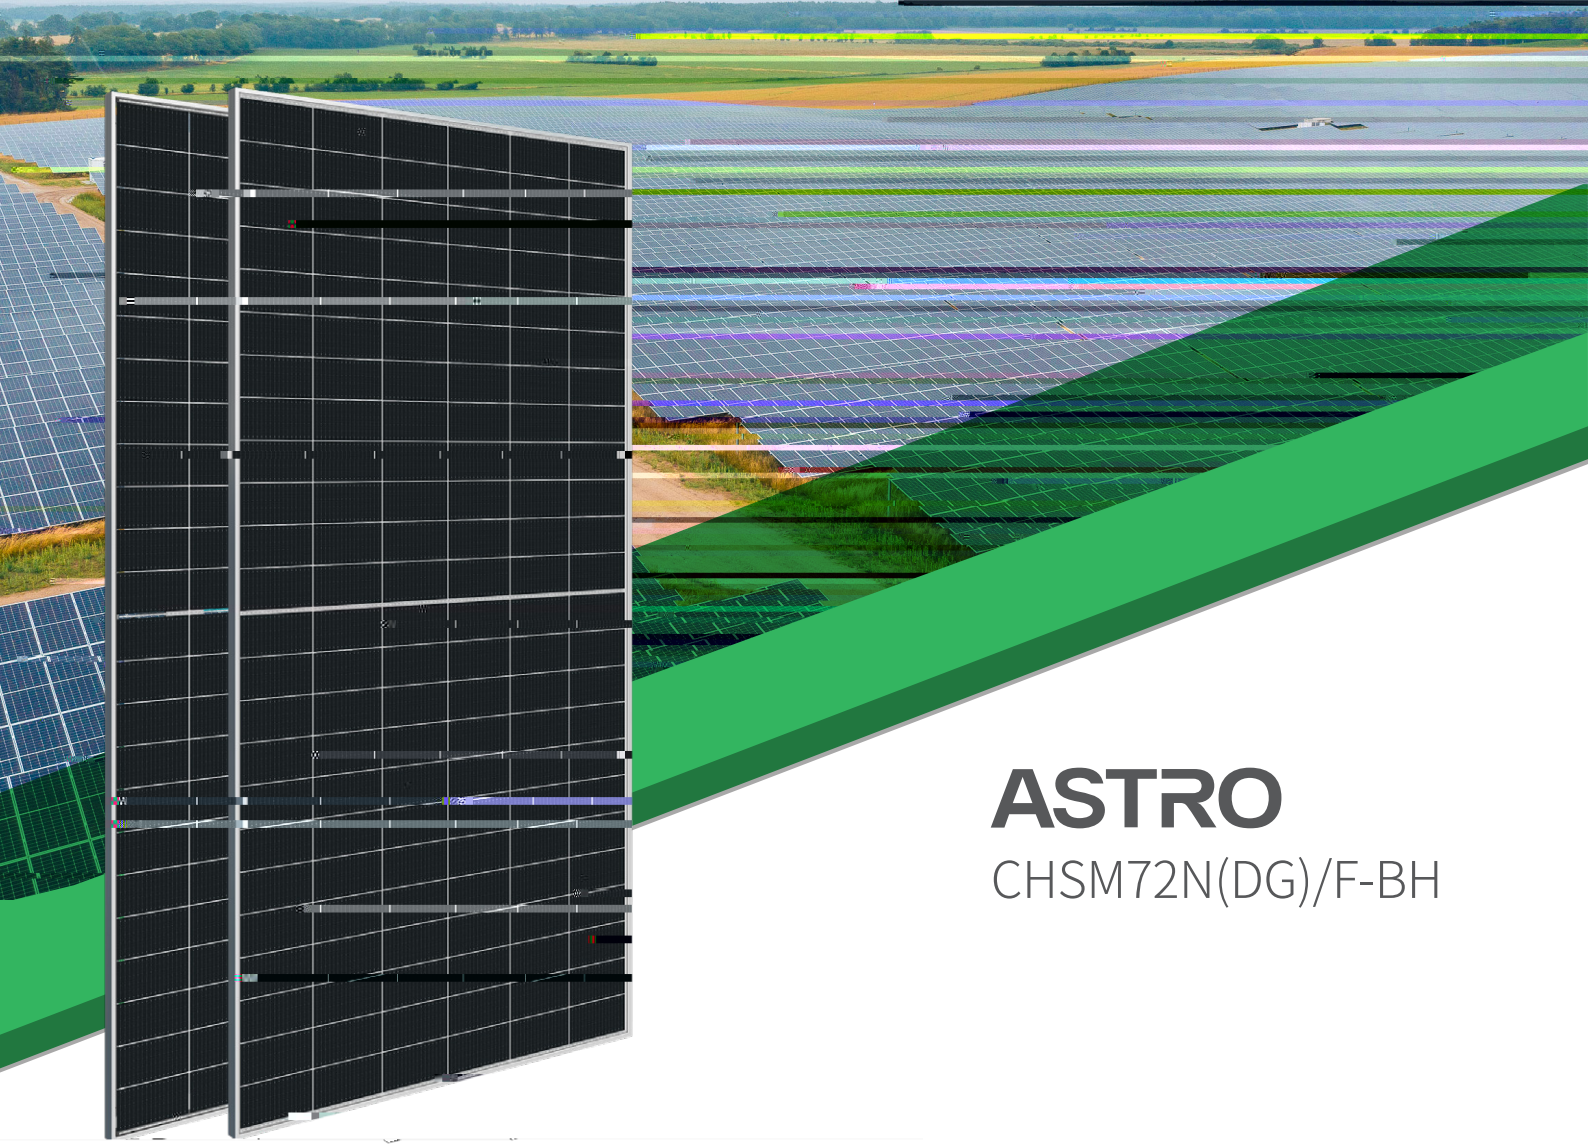

ASTRO


CHSM72N(DG)/F-BH



质保

15¹⁵

30³⁰

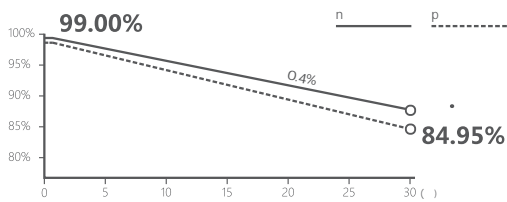

功率范围	功率公差	最高组件转换效率	首年衰减	历年衰减
------	------	----------	------	------

机械参数

(x x)	2278x1134x30mm			
	n			
	144 (6*24)			
	20+20mm			
()	: (+)350mm (-)250mm			
(IEC/UL)	4mm / 12AWG			
	5400Pa () / 2400Pa ()			
(IEC/UL)	HCB40() / MC4-EVO2A ()			
	321 kg			
	36 /			
	1207 kg			
	(17.5m)900 / ()			

电气性能参数

STC: 光照强度 1000W/m², 电池温度 25°C, 大气质量 =1.5

NMOT: 光照强度 800W/m², 环境温度 20°C, 大气质量 =1.5, 风